

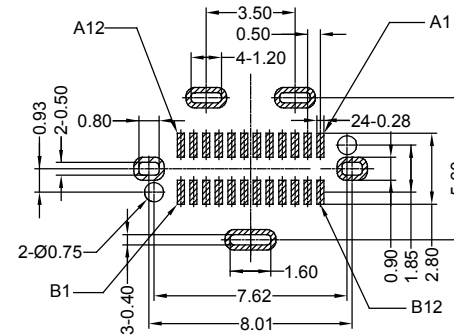
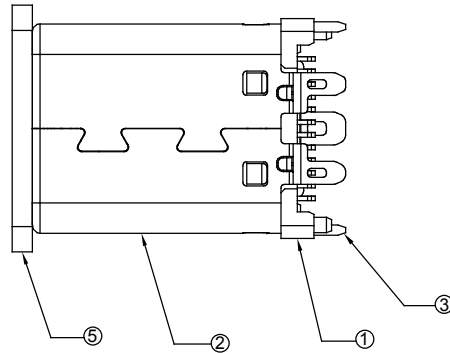
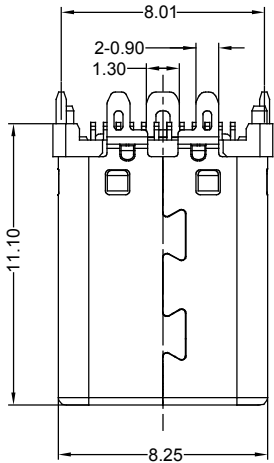

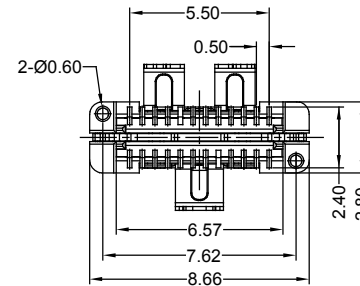


TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	±0.50
.X	±0.30
.XX	±0.20
.XXX	±0.10

THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.

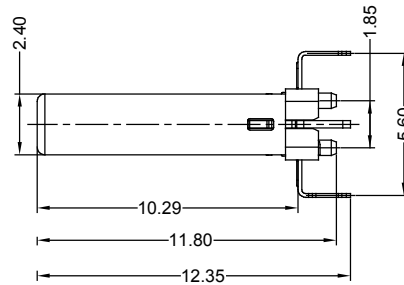

RECOMMENDED P.C.B LAYOUT T=0.80±0.05  
COMPONENT SIDE (GENERAL TOLERANCE: ±0.05)

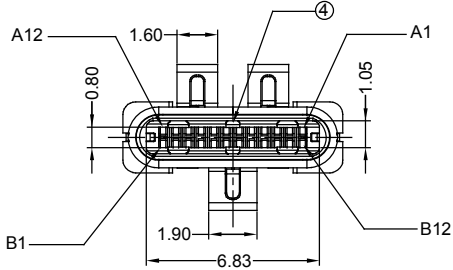


A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

OPERATING TEMPERATURE: -30°C ~ 85°C

CURRENT RATING: 3.0A MAX  
 VOLTAGE RATING: 100V AC  
 CONTACT RESISTANCE: 40mΩ MAX.  
 INSULATOR RESISTANCE: 100MΩ min.  
 INSERTION FORCE: 5N~20N  
 UNMATING FORCE: 8N~20N  
 DURABILITY: 10000 CYCLES

5	COVER	HIGH TEMPERATURE PLASTIC	LCP BLACK	1PC
4	SPRING	STAINLESS STEEL	/	2PCS
3	LATCH	STAINLESS STEEL	80µ" ~120µ"min TIN PLATING, 50µ" min NICKEL UNDERPLATING	1PC
2	SHELL	STAINLESS STEEL	50µ" min NICKEL PLATING	1PC
1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK/ CONTACT: 3µ" min GOLD PLATING, 50µ" min NICKEL UNDERPLATING	2PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

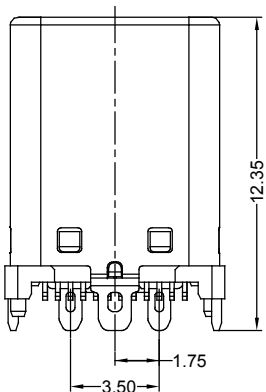

USB TYPE C, VERTICAL

ACAD REFERENCE NO.: 690-024-260-032

DRAWN: Y.Z DATE: OCT. 26/2017

CHECKED: DATE:

SCALE: (IN C.A.D. 1:1) SHEET 1 OF 1

DRAWING NUMBER: 690-024-260-032

ISSUE

PART NUMBER: 690-024-260-032

1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



EDAC INC  
TORONTO, ONTARIO  
CANADA  
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.